


Electric Reach Truck

Model		CQD20H(EPS)	CQD20H(EPS)
Rated capacity	Q(kg)	2000	2000
Load centre	C(mm)	500	500
Service weight	kg	4240	4840
Drive wheel dimension	mm	Φ406X152	Φ406X152
Fork wheel dimension	mm	Φ340X134	Φ340X134
Height, mast lowered	H1(mm)	3390/3590/3890	4190/4490/4790
Free lift	H2(mm)	2700/2900/3200	3600/3900/4200
Max. lift height	H3(mm)	8000/8600/9500	10200/11100/12000
height, mast extended	H4(mm)	8800/9400/10300	11000/11900/12800
Height of overhead guard(cabin)	H6(mm)	2200	2200
Seat height	H7(mm)	1060	1060
Height of crura	H8(mm)	355	355
Fork dimensions	s/s'(mm)	40/120/1070	40/120/1070
Overall length	L1(mm)	2510	2510
Length (from forks bracket)	L2(mm)	1440	1440
Reach distance	L4(mm)	600	700
Length (bearing fork)	L7(mm)	1950	2050
Overall width	b1(mm)	1510	1510
Front width	b2(mm)	1260	1260
Alse width for pallets 1000x1200 crossways	Ast'(mm)	2920	2920
Alse width for pallets 800x1200 crossways	Ast(mm)	2880	2880
Turning radius	Wa(mm)	1820	1820
Travel speed, laden/unladen	km/h	9.3	9
Lift speed, laden/unladen	mm/s	240/300	240/300
Lower speed, laden/unladen	mm/s	500/400	500/400
Battery dimension	mm	1220X344X727	1220X344X727
Battery capacity	AH	500	500
Battery voltage	V	48	48
Battery weight	kg	860	860



DIMENSIONS

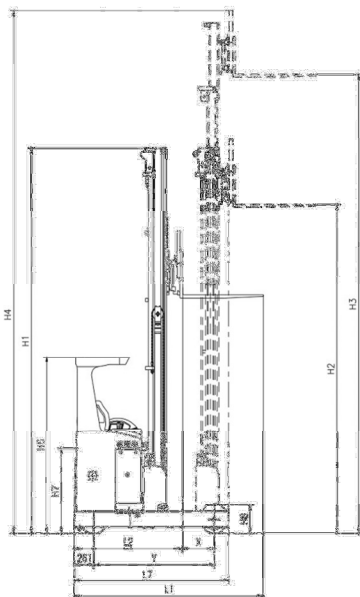